

STABILO® Professional

Mobile scaffold series 10

- + TÜV-approved, suitable for a load of 200 kg/m² (scaffold class 3) in accordance with DIN EN 1004
- + Equipped with sturdy steel stabilisers with castors for a maximum of stability
- + With height-adjustable castors (Ø 150 mm) for secure placement on uneven grounds
- + The platforms can be easily fitted between any of the diagonal braces and can be height-adjusted in 25 cm spacings without any changes to the scaffold itself
- + Scaffolds with a working height of 7.40 m or higher are supplied with outriggers
- + Field length: 2.00 m or 2.50 m
- + Field width: 0.75 m



Depending on the configurations shown below additional ballast weights are required (sold separately as accessories). Please see the assembly instructions in the manual or on our website www.krause-systems.de for more information on the quantity of ballast weights needed. System components are shown on page 132 and following.



| | | Field length of scaffold 2.00 m – field width of scaffold 0.75 m | | | | | | | | | | | | |
|-------------|------------------------|--|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | A up to approx. | in m | 3.00 | 4.40 | 5.40 | 6.40 | 7.40 | 8.40 | 9.40 | 10.40 | 11.40 | 12.40 | 13.40 | 14.40 |
| | B approx. | in m | 1.00 | 2.40 | 3.40 | 4.40 | 5.40 | 6.40 | 7.40 | 8.40 | 9.40 | 10.40 | 11.40 | 12.40 |
| | C approx. | in m | 2.30 | 3.40 | 4.40 | 5.40 | 6.40 | 7.40 | 8.40 | 9.40 | 10.40 | 11.40 | 12.40 | 13.40 |
| Weight | | in kg | 49.0 | 98.0 | 106.0 | 117.0 | 161.0 | 172.0 | 195.0 | 207.0 | 234.0 | 246.0 | 253.0 | 264.0 |
| Article No. | | | 731302 | 731319 | 731326 | 731333 | 731340 | 731357 | 731364 | 731371 | 731388 | 731395 | 731401 | 731418 |

| | | Field length of scaffold 2.50 m – field width of scaffold 0.75 m | | | | | | | | | | | | |
|-------------|------------------------|--|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | A up to approx. | in m | 3.00 | 4.40 | 5.40 | 6.40 | 7.40 | 8.40 | 9.40 | 10.40 | 11.40 | 12.40 | 13.40 | 14.40 |
| | B approx. | in m | 1.00 | 2.40 | 3.40 | 4.40 | 5.40 | 6.40 | 7.40 | 8.40 | 9.40 | 10.40 | 11.40 | 12.40 |
| | C approx. | in m | 2.30 | 3.40 | 4.40 | 5.40 | 6.40 | 7.40 | 8.40 | 9.40 | 10.40 | 11.40 | 12.40 | 13.40 |
| Weight | | in kg | 53.0 | 109.0 | 117.0 | 131.0 | 179.0 | 193.0 | 216.0 | 230.0 | 262.0 | 276.0 | 284.0 | 297.0 |
| Article No. | | | 741301 | 741318 | 741325 | 741332 | 741349 | 741356 | 741363 | 741370 | 741387 | 741394 | 741400 | 741417 |

Mobile scaffold series 10



Working height: 3.00 m
Scaffold height: 2,30 m
Platform height: 1.00 m



Working height: 4.40 m
Scaffold height: 3,40 m
Platform height: 2.40 m




Working height: 5.40 m
Scaffold height: 4,40 m
Platform height: 3.40 m




Working height: 6.40 m
Scaffold height: 5,40 m
Platform height: 4.40 m




Working height: 7.40 m
Scaffold height: 6,40 m
Platform height: 5.40 m




Working height: 8.40 m
Scaffold height: 7,40 m
Platform height: 6.40 m

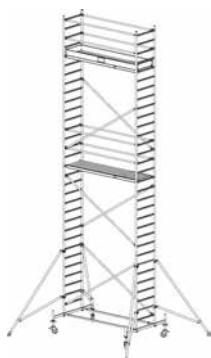


Working height: 9.40 m
Scaffold height: 8,40 m
Platform height: 7.40 m

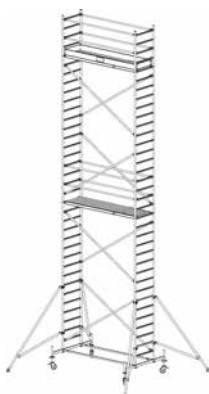


Working height: 10.40 m
Scaffold height: 9,40 m
Platform height: 8.40 m

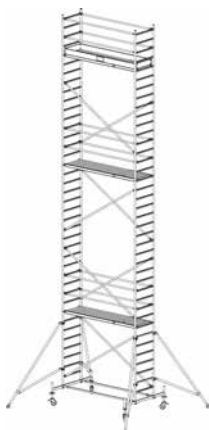


Working height: 11.40 m
Scaffold height: 10,40 m
Platform height: 9.40 m

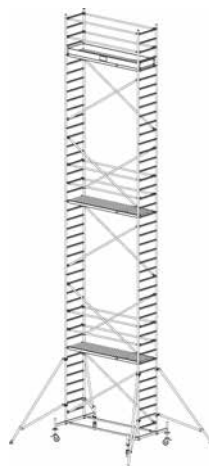

Working height: 12.40 m
Scaffold height: 11,40 m
Platform height: 10.40 m

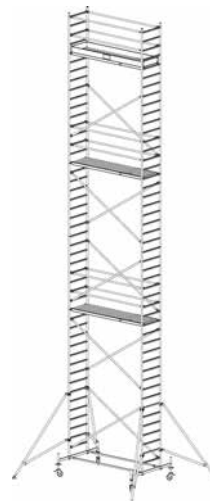

Working height: 13.40 m
Scaffold height: 12,40 m
Platform height: 11.40 m

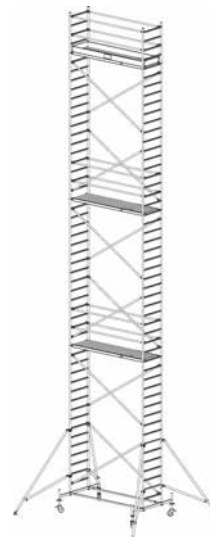

Working height: 14.40 m
Scaffold height: 13,40 m
Platform height: 12.40 m

| Working height m | Field length of scaffold | Field length of scaffold | 3.00 m | 4.40 m | 5.40 m | 6.40 m | 7.40 m | 8.40 m | 9.40 m | 10.40 m | 11.40 m | 12.40 m | 13.40 m | 14.40 m |
|--|--------------------------|--------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Platform height m | | | 1.00 m | 2.40 m | 3.40 m | 4.40 m | 5.40 m | 6.40 m | 7.40 m | 8.40 m | 9.40 m | 10.40 m | 11.40 m | 12.40 m |
| Scaffold height m | | | 2.30 m | 3.40 m | 4.40 m | 5.40 m | 6.40 m | 7.40 m | 8.40 m | 9.40 m | 10.40 m | 11.40 m | 12.40 m | 13.40 m |
| Parts list | Article No. | Article No. | Quantity | Quantity | Quantity | Quantity | Quantity | Quantity | Quantity | Quantity | Quantity | Quantity | Quantity | Quantity |
| Vertical frame 2 m | 705167 | 705167 | 2 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| Vertical frame 1 m | 705174 | 705174 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Platform with hatch | 701213 | 701220 | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| Diagonal brace | 702852 | 702845 | 1 | 2 | 2 | 4 | 4 | 6 | 6 | 8 | 8 | 10 | 10 | 12 |
| Rail brace | 702210 | 702203 | 1 | 4 | 4 | 4 | 8 | 8 | 8 | 8 | 12 | 12 | 12 | 12 |
| Base brace | 912848 | 912831 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Stabiliser | 914071 | 914071 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Outrigger | 914095 | 914095 | 0 | 0 | 0 | 0 | 2 | 2 | 4 | 4 | 4 | 4 | 4 | 4 |
| Longitudinal board | 703743 | 703743 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Transversal board | 703712 | 703729 | 0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Foot plate | 914026 | 914026 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Set of castors Ø 150 mm, height-adjustable | 914309 | 914309 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Gravity pin | 704405 | 704405 | 4 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 32 |

Accessories

| Article No. | Parts list | Weight (kg) |
|-------------|--|-------------|
| 910059 | Set of stabilisers, 1.2 m | 6.9 |
| 910066 | Set of stabilisers, 1.5 m | 8.4 |
| 704306 | Ballast weight | 10.0 |
| 914309 | Set of castors Ø 150 mm, height-adjustable | 14.0 |
| 714138 | Castor Ø 150 mm, rubber-coated | 3.5 |