

STABILO® Professional

Mobile scaffold series 100

- + TÜV-approved, suitable for a load of 200 kg/m² (scaffold class 3) in accordance with DIN EN 1004
- + A multipurpose aluminium scaffold available with a working height up to 14.00 m
- + Extremely easy to move on its stabilisers when fully assembled
- + With height-adjustable castors (Ø 150 mm) for secure placement on uneven grounds
- + The platforms can easily be fitted between any of the diagonal braces and can be height-adjusted in 25 cm spacings without any changes to the scaffold itself
- + Scaffolds with a working height of 7.40 m and higher are supplied with outriggers
- + Field length: 2.00 m, 2.50 m or 3.00 m
- + Field width: 0.75 m



Depending on the configurations shown below additional ballast weights are required (sold separately as accessories). Please see the assembly instructions in the manual or on our website www.krause-systems.de for more information on the quantity of ballast weights needed. System components are shown on page 132 and following.




73100		Field length of scaffold 2.00 m – field width of scaffold 0.75 m											
	A up to approx.	in m	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40		
	B approx.	in m	2.40	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40		
	C approx.	in m	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40		
Weight		in kg	116.0	127.0	134.0	178.0	192.0	216.0	227.0	254.0	266.0		
Article No.			731050	731067	731074	731081	731098	731104	731111	731128	731135		
74100		Field length of scaffold 2.50 m – field width of scaffold 0.75 m											
	A up to approx.	in m	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40	14.40
	B approx.	in m	2.40	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40
	C approx.	in m	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40
Weight		in kg	127.0	141.0	148.0	197.0	214.0	238.0	252.0	284.0	298.0	305.0	319.0
Article No.			741059	741066	741073	741080	741097	741103	741110	741127	741134	741141	741158
75100		Field length of scaffold 3.00 m – field width of scaffold 0.75 m											
	A up to approx.	in m	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40	14.40
	B approx.	in m	2.40	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40
	C approx.	in m	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40
Weight		in kg	143.0	158.0	165.0	225.0	246.0	270.0	284.0	328.0	343.0	350.0	365.0
Article No.			751461	751560	751669	751768	751867	751966	751065	751164	751263	751362	751409


Mobile scaffold series 100




Working height: 4.40 m
Scaffold height: 3.40 m
Platform height: 2.40 m




Working height: 5.40 m
Scaffold height: 4.40 m
Platform height: 3.40 m




Working height: 6.40 m
Scaffold height: 5.40 m
Platform height: 4.40 m

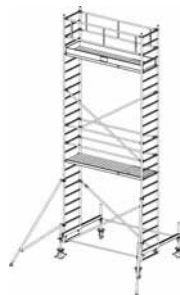


Working height: 7.40 m
Scaffold height: 6.40 m
Platform height: 5.40 m




Working height: 8.40 m
Scaffold height: 7.40 m
Platform height: 6.40 m

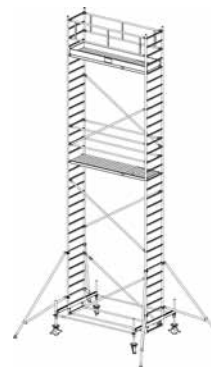


Working height: 9.40 m
Scaffold height: 8.40 m
Platform height: 7.40 m

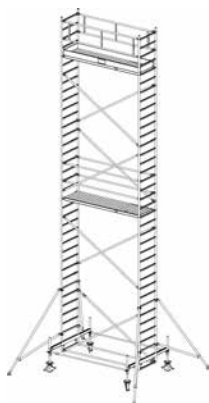


Working height: 10.40 m
Scaffold height: 9.40 m
Platform height: 8.40 m

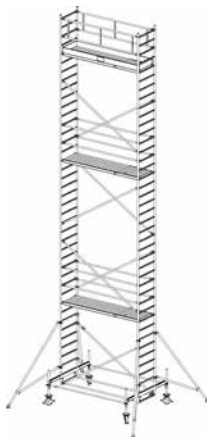


Working height: 11.40 m
Scaffold height: 10.40 m
Platform height: 9.40 m

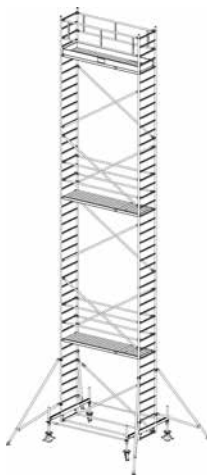

Working height: 12.40 m
Scaffold height: 11.40 m
Platform height: 10.40 m

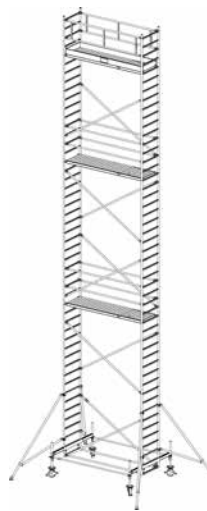

Working height: 13.40 m
Scaffold height: 12.40 m
Platform height: 11.40 m

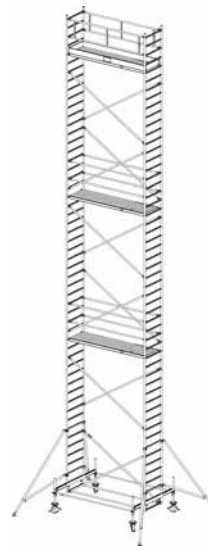

Working height: 14.40 m
Scaffold height: 13.40 m
Platform height: 12.40 m

Only for scaffolds with field length of 2.50 m or 3.00 m

Working height m	Field length of scaffold	Field length of scaffold	Field length of scaffold	4.40 m	5.40 m	6.40 m	7.40 m	8.40 m	9.40 m	10.40 m	11.40 m	12.40 m	13.40 m	14.40 m
				2.40 m	3.40 m	4.40 m	5.40 m	6.40 m	7.40 m	8.40 m	9.40 m	10.40 m	11.40 m	12.40 m
Platform height m														
Scaffold height m														
Parts list	Article No.	Article No.	Article No.	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity	Quantity
Vertical frame 2 m	705167	705167	705167	2	3	4	5	6	7	8	9	10	11	12
Vertical frame 1 m	705174	705174	705174	2	2	2	2	2	2	2	2	2	2	2
Platform with hatch	701213	701220	701237	1	1	1	2	2	2	2	3	3	3	3
Diagonal brace	702852	702845	702869	2	4	4	4	6	6	8	8	10	10	12
Rail brace	702210	702203	702241	0	0	0	4	6	6	6	10	10	10	10
Railing frame	702517	702500	702531	2	2	2	2	2	2	2	2	2	2	2
Base brace	704085	704078	704122	2	2	2	2	2	2	2	2	2	2	2
Telescopic stabiliser	704207	704207	704207	2	2	2	2	2	2	2	2	2	2	2
Outrigger	914095	914095	914095	0	0	0	2	2	4	4	4	4	4	4
Longitudinal board	703743	703743	703743	2	2	2	2	2	2	2	2	2	2	2
Transversal board	703712	703729	703736	2	2	2	2	2	2	2	2	2	2	2
Castor Ø 200 mm, height-adjustable	704108	704108	704108	4	4	4	4	4	4	4	4	4	4	4
Gravity pin	704405	704405	704405	8	10	12	14	16	18	20	22	24	26	28

Accessories

Article No.	Parts list	Weight (kg)
910059	Set of stabilisers, 1.2 m	6.9
910066	Set of stabilisers, 1.5 m	8.4
704306	Ballast weight	10.0
704160	Compensation sleeve for vertical frame	3.0
703972	Climbing aid	10.0
123718	TeleBoard 200	11.4